


Machine safety door – electrical drive

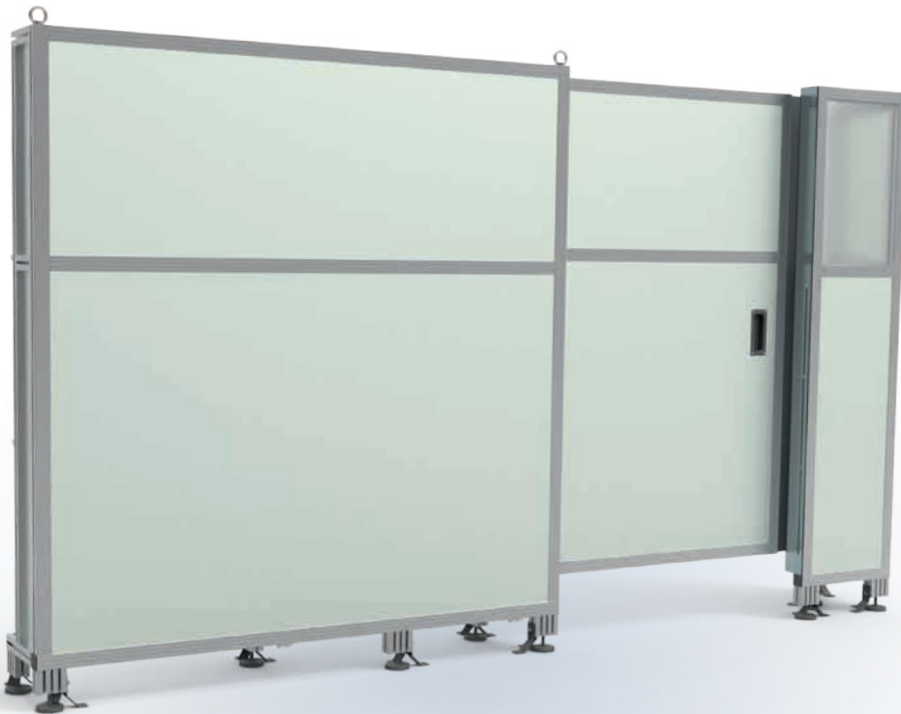

Technical data

Depth	215 mm
Opening width	up to 3500 mm
Height	according to customer requirements
Cycle times	dependent on the size
Opening and Closing force	max. clamping force 150 N max. kinetic energy 10J
Maximum speed	0,8 m/s
Safety switch	according to individual requirements
Cladding material	depending on application, e.g. sheet metal, plastic, glass, Dibond etc.
Article group	S02-032

Standard system – we will be pleased to offer other solutions on request.



We also offer all KANYA SAFE Solutions with manual operation.
Article group: S02-031

Application

The machine safety door ensures free access for loading and unloading the machine.

